


Blinking/permanent | LED light module | RGB/colourless lens

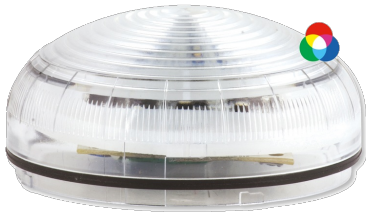

Specifications

Brand	PIPS	Light source	LED
CE certificate	Yes	Luminous intensity	85cd
Certificates, quality marks, markings	CE, UL type 4X, EAC	Operating temperature	-30°C to +50°C
Colour lens	Clear	Particularities	Blinks ± 120x1/minute or ± 36x2/minute and flashes ± 60x4/minute or in a random pattern
Dimensions	Ø92mm x 42,5mm	Rated current	12V AC/DC 310mA / 24V AC/DC 180mA / 40V AC/DC 150A / 80V AC/DC 85mA / 120V AC 65mA / 240V AC 55mA
Ingress protection	IP66	Type	PIPS module
LED life	100 000h	UL certificate	Yes
LEDs colour	Multicolor	Voltage	Depending on the installed base
Light patterns	Steady, blinking and rotating	Weight	90g

Good to know i

This module has a multi-channel technology where you can compose 3 alarm levels completely by yourself. Choose from no less than 8 colours and 5 light effects. Moreover, with this technology you can easily switch the different levels externally. PL301 is equipped with an opal lens for short distance signalling.

