


PL302

## Blinking/permanent | LED light module | RGB/clear lens

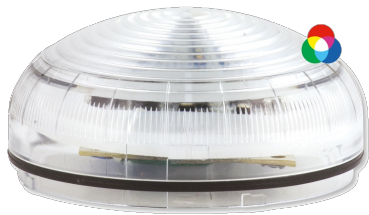

### Specifications

Brand	PIPS	Luminous intensity	85cd
CE certificate	Yes	Operating temperature	-30°C to +50°C
Certificates, quality marks, markings	CE, UL type 4X, EAC	Particularities	Blinks ± 120x1/minute or ± 36x2/minute and flashes ± 60x4/minute or in a random pattern
Colour lens	Clear	Rated current	12V AC/DC 310mA / 24V AC/DC 180mA / 40V AC/DC 150A / 80V AC/DC 85mA / 120V AC 65mA / 240V AC 55mA
Dimensions	Ø92mm x 42,5mm	UL certificate	Yes
Ingress protection	IP66	Voltage	Depending on the installed base
LED life	100 000h	Weight	90g
LEDs colour	Multicolor		
Light patterns	Steady, blinking and rotating		
Light source	LED		

### Good to know i

This module has a multi-channel technology where you can compose 3 alarm levels completely by yourself. Choose from no less than 8 colours and 5 light effects. Moreover, with this technology you can easily switch the different levels externally. PL301 is equipped with an opal lens for short distance signalling.

