


**D105AXDC0**  
**24G-UL**

**Electronic multitone siren with recording function, aluminium, max. 112dB @ 1m, 10-30V DC, grey**

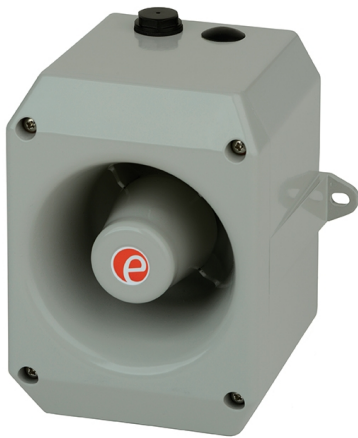

## Specifications

Alarm stages	4	Operating voltage	10-30V DC
Brand	E2S	Range	60m
CE certificate	Yes	Rated voltage	24V DC
Cable entry	-40°C to +60°C	Relative humidity	Less than 90% (no condensation) at 20°C
Certificates, quality marks, markings	CE, UL, cUL, EAC	Sound level (max)	110dB(A)
Colour	RAL 7038 grey	Type	Pre-configured
Dimensions	147mm x 130mm x 180mm	UL certificate	Yes
Effective range	60m @ 1KHz	Voltage	24V
Ingress protection	IP66	Voltage type	DC
Material	Aluminum	Volume control	Full range control
Model	Electronic multitone siren with recording function	Weight	1600g
Mounting type	Outside mounting lugs		
Number of tones	45		
Operating temperature	-25°C to +55°C		

## Good to know

Cette version en aluminium est résistante aux UV. En plus, il est possible de créer 4 messages de 30s.

D105AX

