


D112AC024
G

Electronic multitone siren | aluminum housing |
max. 119dB @ 1m | 24V AC | grey

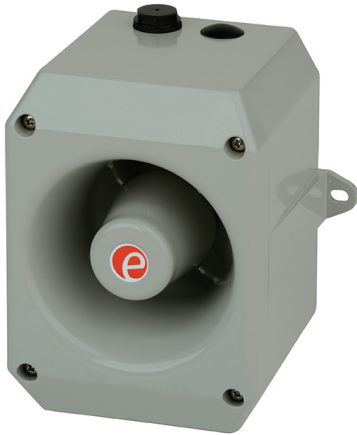

Specifications

Alarm stages	3	Operating temperature	-25°C to +55°C
Brand	E2S	Operating voltage	24V AC +- 10%
CE certificate	Yes	Range	125m
Cable entry	-40°C to +60°C	Rated current	24V AC 500mA
Certificates, quality marks, markings	CE, UL, cUL	Rated voltage	24V AC
Colour	RAL 7038 grey	Relative humidity	Less than 90% (no condensation) at 20°C
Dimensions	147mm x 130mm x 125mm	Sound level (max)	119dB(A)
EN 54-3	Yes	Type	Pre-configured
Effective range	125m @ 1KHz	UL certificate	Yes
Ingress protection	IP66	Voltage	24V
Material	Aluminum	Voltage type	AC
Model	Electronic multitone siren	Volume control	12dB(A)
Mounting type	Outside mounting lugs	Weight	1850g
Number of tones	45		

Good to know

This aluminium version is UV resistant.