


118110-01

TUBELED 40 II | Power | 280mm | White

EAN: 4260556622668

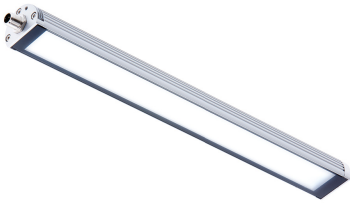

Specifications

| | | | |
|---------------------------------------|---------------------------------|-----------------------|--|
| Beam angle | 100° | Length | 280mm |
| Brand | LED2WORK | Light efficiency | 155lm/W |
| Certificates, quality marks, markings | CE, UKCA, ETL Listed | Light source | LED |
| Colour | White (daylight) | Luminous flux | 1899lm |
| Colour rendering | >85 | Made in | Germany |
| Colour temperature range | 5200K - 5700K | Material | Housing: aluminium lens: safety glass |
| Connection | M12 (A-code), 5-pin | Operating temperature | -30°C to +60°C |
| Design | TUBELED 40 II Power | Power (max.) | 12W |
| Dimensions | 280mm x 29mm x 40mm | Rated voltage | 24V DC |
| Dimmable | Yes, with optional accessory | Weight | 360g |
| Ingress protection | IP67/IP69K | Window type | Diffused safety glass |
| LED life | >60 000h | | |

